

LEXUS SERIES BLAST FREEZER - BLAST CHILLER

Digital



Touch



Features:

- Powerful and compact blast freezer & blast chiller
- Available in Digital & Touch options
- Internal rounded corners
- Temperature Control Probe
- Electronic Control of Temperature
- Self-closing door with magnetic gasket


Available Finishes:

Stainless Steel


All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.

LEXUS SERIES BLAST FREEZER - Technical Specifications

Top View

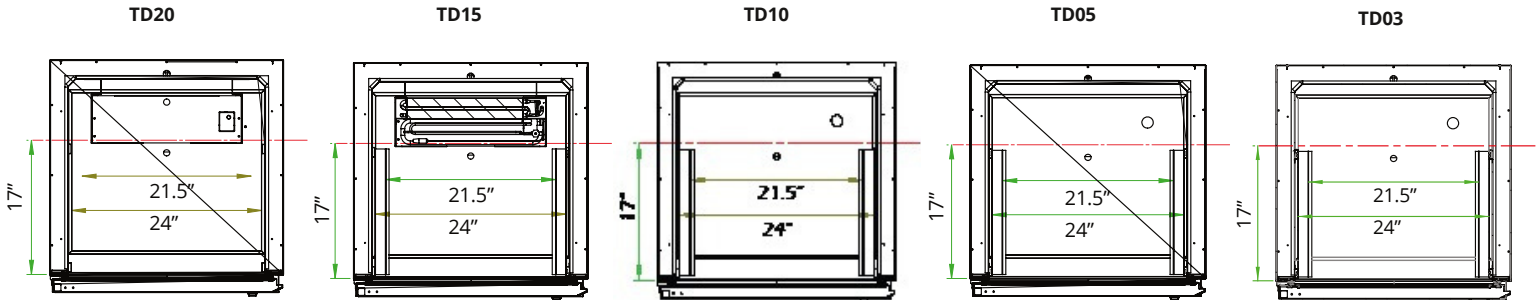

Front View

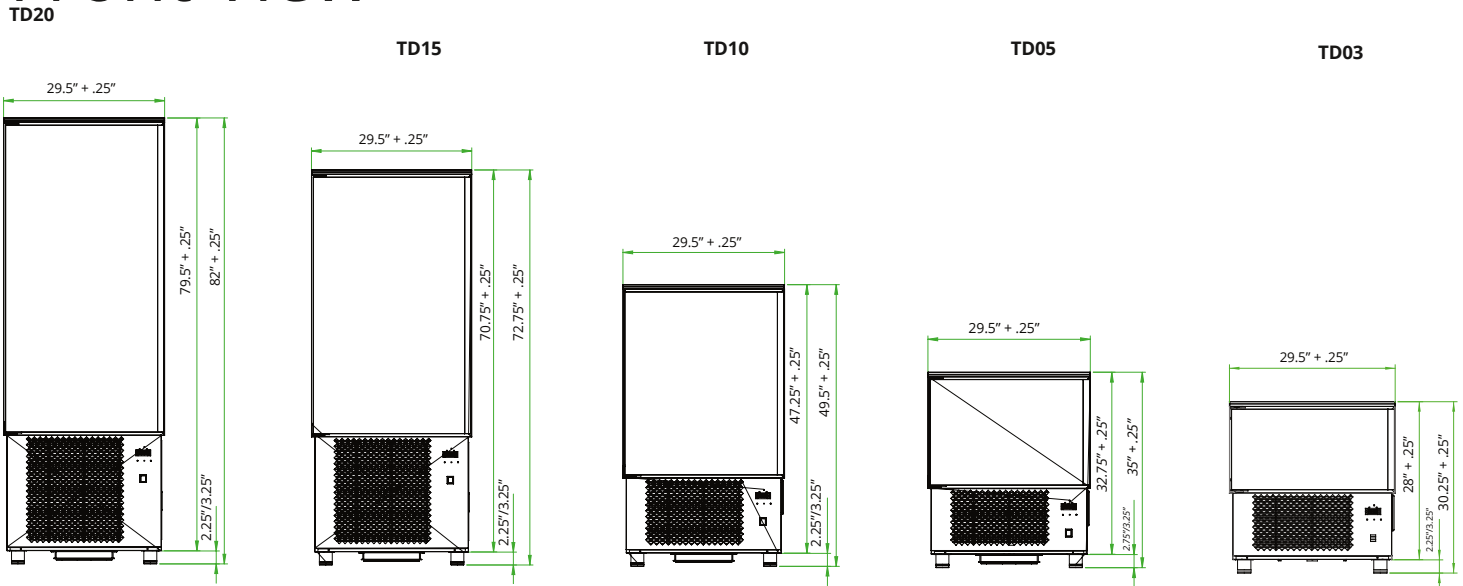


LEXUS BLAST FREEZER/ BLAST CHILLER - TECHNICAL SPECIFICATIONS

Type	Model	Temp. Range	# of Shelves	# of 5L Gelato Pan Reserve	Width	Height	Depths	Electrical Requirements
Digital	TD03D	-0.4/-40° F	1	3	29.5" (750mm)	29.5" (750mm)	29" (740mm)	220V/1Phase/60Hz
	TD05D	-0.4/-40° F	2	6	29.5" (750mm)	34.25" (870mm)	29" (740mm)	220V/1Phase/60Hz
	TD10D	-0.4/-40° F	5	15	29.5" (750mm)	51.25" (1300mm)	29" (740mm)	220V/1Phase/60Hz
	TD15D	-0.4/-40° F	7	21	29.5" (750mm)	73.25" (1860mm)	29" (740mm)	220V/3Phase/60Hz
	TD20D	-0.4/-40° F	10	30	29.5" (750mm)	83.5" (2120mm)	29" (740mm)	220V/3Phase/60Hz
Touch	TD03T	-0.4/-40° F	1	3	29.5" (750mm)	29.5" (750mm)	29" (740mm)	220V/1Phase/60Hz
	TD05T	-0.4/-40° F	2	6	29.5" (750mm)	34.25" (870mm)	29" (740mm)	220V/1Phase/60Hz
	TD10T	-0.4/-40° F	5	15	29.5" (750mm)	51.25" (1300mm)	29" (740mm)	220V/1Phase/60Hz
	TD15T	-0.4/-40° F	7	21	29.5" (750mm)	73.25" (1860mm)	29" (740mm)	220V/3Phase/60Hz
	TD20T	-0.4/-40° F	10	30	29.5" (750mm)	83.5" (2120mm)	29" (740mm)	220V/3Phase/60Hz

Gelato

29.5" (750mm)

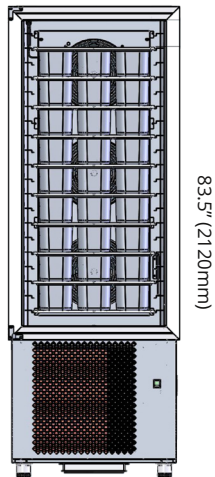

83.5" (2120mm)


TD20



29.5" (750mm)

73.5" (1860mm)


TD15

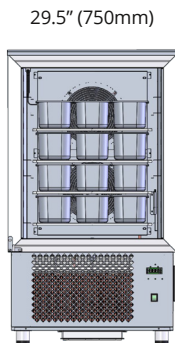

29.5" (750mm)

51.25" (1300mm)


TD10

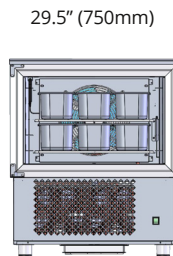

29.5" (750mm)

34.25" (870mm)

TD05



29.5" (750mm)

29.5" (750mm)

TD03

Accessories:

Temperature Control Probe
(Standard)



Castor Wheels
(At Request)

